

AUTOMATIC PP. STRAPPING MACHINE




FAST! VERSATILE! DEPENDABLE!

F-678

PP. STRAPPING MACHINE

F-678

- EASY AND FAST IN HIGH EFFICIENCY**
CAN BE EASILY OPERATED BY SELECTED FOOT PEDAL, PUSH BUTTON OR TABLE FLOATING SWITCH, AND HIGH EFFICIENCY WITH FAST SPEED FOR 2.0 SEC/PER CYCLE FOR NORMAL PACKAGES.
- ENERGY SAVING & QUIET**
MAX. TENSION ACQUIRED IN LOW CONSUMPTION POWER, ALSO THE AUTO-SHUT OFF MOTOR WILL BE STOPPED AFTER EACH CYCLE.
- WIDELY TENSION ADJUSTMENT IN SOLID & PRECISE STRUCTURE**
-ALUMINUM ALLOY MONOBLOCK STRUCTURED BODY IN PRECISE FINISH PROCESS, DURABLE FOR CONTINUOUS APPLICATIONS.
-EASY ADJUSTMENT FOR TENSION STRENGTH, AVAILABLE FROM 0.5KG OF SOFT STRAPPING TO 70KG FOR HARD OR HEAVY PACKAGES.
- PERFECT WELDING TO STRAP BY ELECTRONIC AUTO CONTROL**
THE WELDING TEMPERATURE ALWAYS BE KEPT IN OPTIMUM, NOT BE EFFECTED BY WEATHER OR SEASONAL CHANGE.
- EXCELLENT IN ADVANCED ELECTRICAL CONTROL**
A DESIGN OF WHICH ELECTRICAL COMPONENTS CAN BE PULL OUT OR STICK IN, SAFTY AND EASY FOR DECREASED IN MAINTENANCE.
- LUBRICATION FREE**
SELF-LUBRICATION MECHANISM IS ADOPTED, TROUBLE FREE FROM OILING.

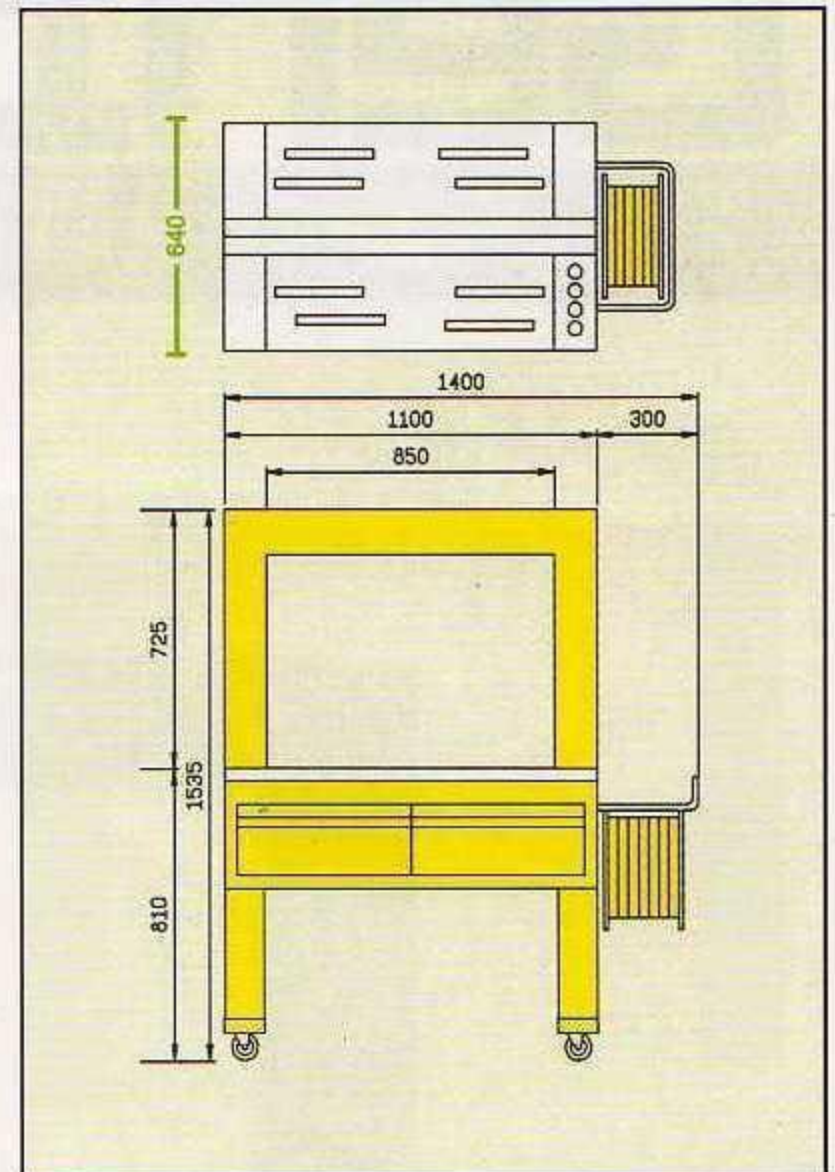

Heavy-duty mechanism construction

COMBINATION OF ARCH SIZES

m/m

H/W	650	850	1050	1250	1450	1650	1850	2050	2250	2450
400							△	▲	▲	▲
500							△	▲	▲	▲
600		Ⓢ				△	▲	▲	▲	▲
800					△	△	▲	▲	▲	▲
1000				△	▲	▲	▲	▲	▲	▲
1200		△	△	▲	▲	▲	▲	▲	▲	▲

Ⓢ STANDARD MODEL △ ARCH MOTOR 1 SET ▲ ARCH MOTOR 2 SET

STANDARD SPECIFICATION

DIMENSIONS	1400(WIDHT),640(DEPTH),1535(HEIGHT)
SEALING METHOD	HEAT SEALED
STRAP WIDTH	9,12,15,19mm
SPEED	30 STRAPS / 60SEC(60HZ)
TENSION	0.5-70KG
POWER SUPPLY	1phase 110/220V. 3phase 220/380,50/60HZ
PACKING SIZE	100-850mm WIDTH , 30-600mm
WEIGHT	220KGS

SMOOTHBONWELL INDUSTRIAL CO., LTD.

7FL-1,NO.79, CHUNG KING N. RD., SEC. 4, Taipei 11165, Taiwan

Tel. + 886-2-2813-1122

Fax. + 886-2-2813-2203

Email. sbl@smoothbonwell.com.tw

Http:// www.smoothbonwell.com.tw